

770 / 771 Video Power Supply




770 Video/CCTV Power Supply Rack Mount, 24VAC, 20A



APPLICATIONS

The rugged 770 serves as a high current power source for video cameras, monitors and other security equipment. The rack mount case provides easy access and saves precious installation space. The front panel provides meters and indicators for at-a-glance status reporting, plus easy access to circuit breakers. The supply is fully ventilated top and bottom, and combined with the efficient toroidal transformer, makes for cool performance even under heavy load.

771 Video Power Control Rack Mount Up to 8 Cameras

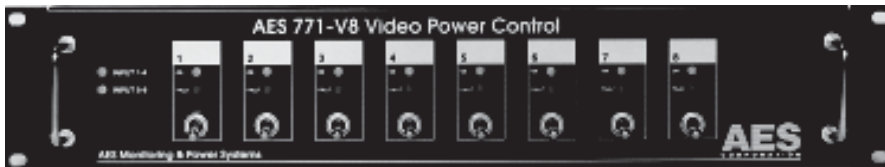

The **771 V-8 Power Controller** has 8 switched power outputs with indicators and reset-able circuit breakers. LED's provide at-a-glance status for every output.


Saves Space; Saves Time! 19" rack mount design includes separate DIN mount terminal block with fast cage clamp connectors. Adds flexibility to adapt to available space and saves connection time.

Indicators: Lights for Input; Output
Output Protection: Self Resetting Fuses,
1.1A or 4.5A protection,
selectable by zone
Terminals: Quick Spring Clamp Type on
Separate DIN Mount Board

AES Corporation
Call 800-237-6387

285 Newbury Street • Peabody, MA 01960 USA
Tel +1-978-535-7310 • Fax +1-978-535-7313
<http://www.aes-security.com>

770-771b.P 08/15/04

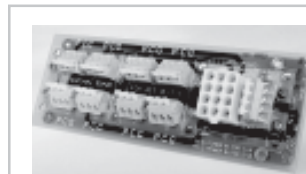

T-771 Connector Block
for Fast, Easy Hookups

- Rugged Rack Mount
- Conserves Space
- Efficient Toroidal Transformer Design Runs Cool
- Large, easy-to-read panel meters
- Easy, Rugged Power Control for 8 Cameras
- At-A-Glance Indicators show status and faults
- High or Low Current Protection, Selectable on Each Output.

**SPECIFICATIONS -
AES 770/771 Video Power Supply and Control**

AES 770 POWER SUPPLY


Input: 115 / 230 V., 50 / 60 Hz.
 Output: 26 VAC; 20 A
 Size: 5.25" High x 19" Wide x 10" Deep
 Indicators: Lights for Input; Output
 Meters: Output - Amperes; Volts
 Input Protection: Circuit Breaker
 Output Protection: Circuit Breaker
 Terminals: Rear of Case, Barrier Block Strip;
 Transformer: High Efficiency Toroid

AES 771 VIDEO POWER CONTROL

Input: 24VAC - up to 36A
 Outputs: 8 Outputs, 24 VAC
 at either 1.1A or 4.5A,
 individually selectable
 Size: 3.5" High x 19" Wide x 2" Deep

AES T-771 CONNECTOR BLOCK

Connectors: Strip 'n Stick, compression type
 No special tool required
 Fast, easy, sure connection
 Mount: DIN
 Links to AES 771 Control via 12 conductor cable (supplied)

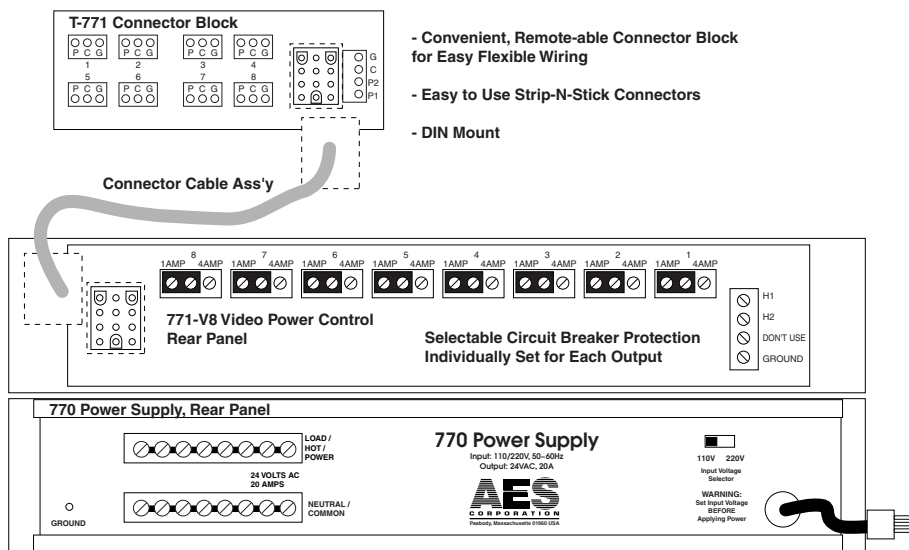

For more information
 Call 800-237-6387 / 978-535-7310
 285 Newbury Street • Peabody, MA 01960 USA
 Fax 978-535-7313
<http://www.aes-security.com>

770-771b.P 08/15/04